


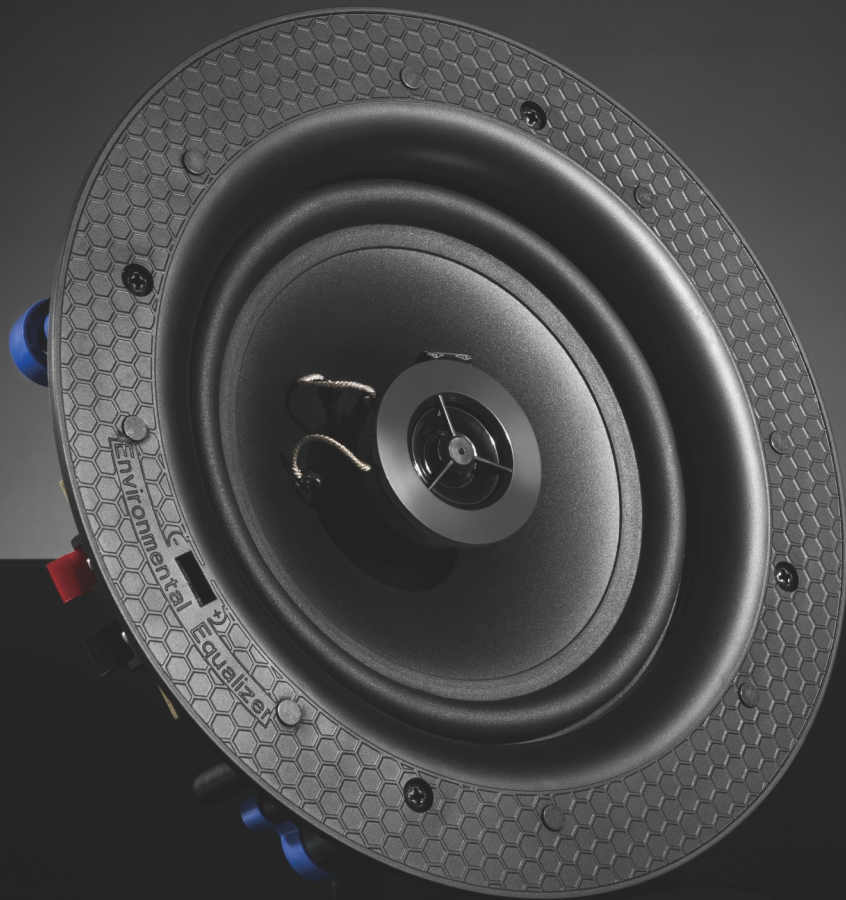

Economic

Frameless Ceiling Speaker



◀ FLC-E Series

Every penny
counts!



Endless listening enjoyment with
attractive price

Dog leg mounting
makes installation
quick and easy.

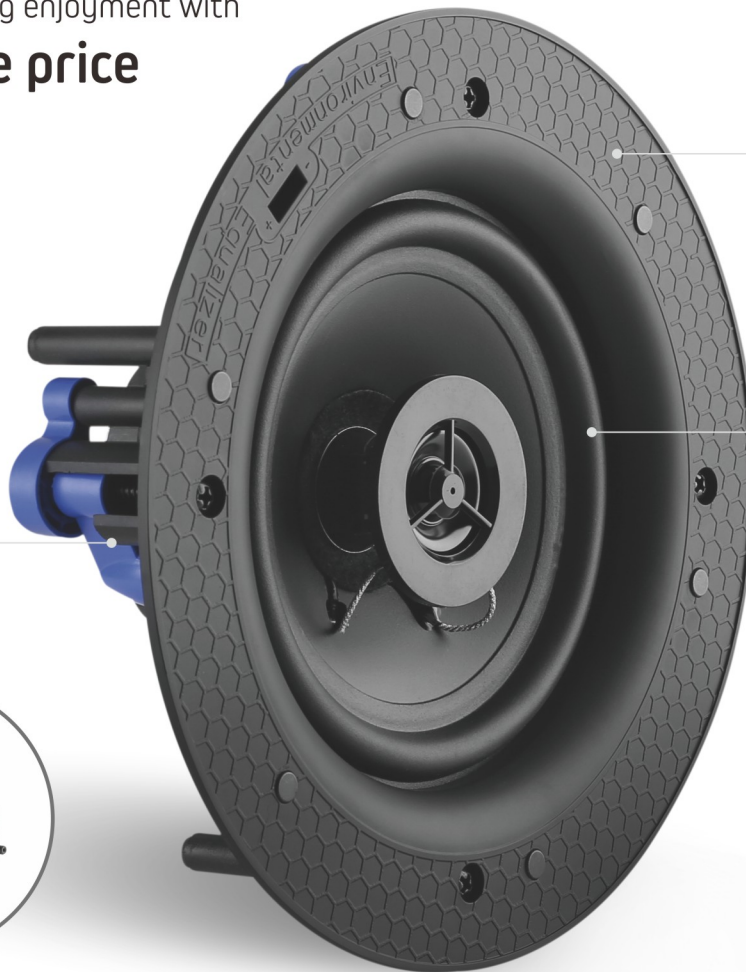

Frameless design
reduces visibility while
adding a modern look.

Rubber surround
gives a noble appearance
and high-end performance.

Customization Option Support

- Tweeter Type: Silk Dome
- Woofer Type: Kevlar Woven Cone
- Additional Transformer: 70V/100V-15W
- Grille Type: Square
- Tweeter Size: 0.5"



Knob-style Transformer Control Options Available

(For FLC-5E-KT, FLC-6E-KT & FLC-8E-KT only)

Transformer: Knob-style Transformer, 15W – 10W – 5W -2.5W& 8ohm

Specifications

	FLC-5E-KT	FLC-6E-KT	FLC-8E-KT
Woofer Type	IMPP	Black PP	Black PP
Woofer Size	5.25"	6.5"	8"
Tweeter Type	Mylar Dome	Mylar Dome	Mylar Dome
Tweeter Size	0.5"	0.5"	0.5"
Frequency Response ($\pm 3\text{dB}$)	75Hz-20kHz	60Hz-20kHz	50Hz-20kHz
Sensitivity (dB)	87	88	89
RMS Power (W)	35	50	60
Nominal Impedance (ohm)	8	8	8
Product Dimensions (mm)	204 x 77 (8.06"x 3.04")	227x 87 (8.9"x 3.4")	284 x 97 (11.2"x 3.8")
Cutout Dimensions (mm)	177 (7")	210(8.3")	257(10.1")
Product Weight	1.15kg/2.5lbs	1.38kg/3lbs	1.66kg/3.7lbs

Specifications

	FLC-5E	FLC-6E	FLC-8E
Woofer Type	IMPP Cone	IMPP Cone	IMPP Cone
Woofer Size	5.25"	6.5"	8"
Tweeter Type	Mylar Dome	Mylar Dome	Mylar Dome
Tweeter Size	0.5"	0.5"	0.5"
Frequency Response ($\pm 3\text{dB}$)	75Hz - 20KHz	65 Hz - 20 KHz	60Hz - 20KHz
Sensitivity (dB)	87	89	89
RMS Power (W)	35	40	50
Nominal Impedance (ohm)	8	8	8
Product Dimensions (mm)	204 x 77 (8.1" x 3")	227 x 87 (9" x 3.4")	284 x 97 (11.2" x 3.8")
Cutout Dimensions (mm)	177 (7")	210 (8.3")	257 (10.2")
Product Weight	0.9kg/1.9lbs	1.5kg/3.3lbs	1.5kg/3.4lbs



Ningbo Lumiaudio Electronic Technology Ltd.

a Lumi Legend Group company

Add: 22/F., Building 1, Lisi Plaza, Huifeng East Road,
Ningbo, China 315100

Tel: 86-574-28938920
Fax: 86-574-27956598

E-mail: info@lumiaudio.cn
Website: www.lumiaudio.cn